

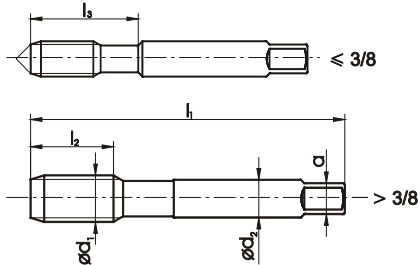


Gwint amerykański zunifikowany UNC, ANSI B-1.1

American unified coarse thread UNC, ANSI B-1.1
Amerikanisches Unified - Grobgewinde UNC, ANSI B-1.1



ISO-529 / DIN-352

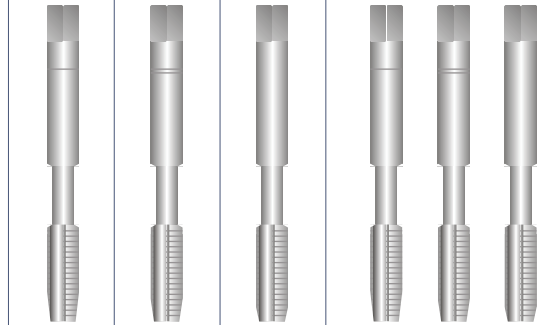

HSS

Typ otworu	Hole type	Lochform				
Wykonanie	Execution	Ausführung	Nr1	Nr2	Nr3	/3
Rodzaj materiału	Quality of material	Qualität	HSS	HSS	HSS	HSS
Nakrój	Chamfer	Anschnitt	8P	4P	2P	
Tolerancja	Tolerance	Toleranz			2B	2B

UNC	$\varnothing d_1$	1"/P	P	l_1	l_2	l_3	$\varnothing d_2$	a					
-----	-------------------	------	---	-------	-------	-------	-------------------	---	--	--	--	--	--

ISO-529										INDEX	A1-131001	A1-132001	A1-133001	A1-130001
No 5 - 40	3,175	40	0,635	48	11	18	3,15	2,5	2,6	4105	•	•	•	•
No 6 - 32	3,505	32	0,794	50	13	18	3,55	2,8	2,7	4106	•	•	•	•
No 8 - 32	4,166	32	0,794	53	13	19	4,5	3,55	3,5	4108	•	•	•	•
No 10 - 24	4,826	24	1,058	58	16	23	5	4	3,8	4110	•	•	•	•
No 12 - 24	5,486	24	1,058	62	17	26	5,6	4,5	4,5	4112	•	•	•	•
1/4 - 20	6,350	20	1,270	66	19	28	6,3	5	5,1	4127	•	•	•	•
5/16 - 18	7,938	18	1,411	72	22	32	8	6,3	6,5	4128	•	•	•	•
3/8 - 16	9,525	16	1,588	80	24	36	10	8	7,9	4129	•	•	•	•
7/16 - 14	11,112	14	1,814	85	25		8	6,3	9,3	4130	•	•	•	•

DIN-352										INDEX	A1-231001	A1-232001	A1-233001	A1-230001
1/2 - 13	12,700	13	1,954	75	25		9	7	10,7	4131	•	•	•	•
9/16 - 12	14,288	12	2,117	80	26		11	9	12,3	4132	•	•	•	•
5/8 - 11	15,875	11	2,309	80	27		12	9	13,5	4133	•	•	•	•
3/4 - 10	19,050	10	2,504	95	32		14	11	16,5	4135	•	•	•	•
7/8 - 9	22,225	9	2,822	100	32		18	14,5	19,5	4137	•	•	•	•
1 - 8	25,400	8	3,175	110	36		18	14,5	22,25	4139	•	•	•	•
1.1/8 - 7	28,575	7	3,629	125	40		22	18	25	4141				
1.1/4 - 7	31,750	7	3,629	125	40		22	18	28	4143				
1.3/8 - 6	34,925	6	4,233	150	50		28	22	30,7	4145				
1.1/2 - 6	38,100	6	4,233	150	50		28	22	34	4147				
1.3/4 - 5	44,450	5	5,080	160	58		36	29	39,5	4151				
2 - 4.1/2	50,800	4.1/2	5,645	180	65		40	32	45	4155				

3