



Wiertła Ratio z wewnętrznym chłodzeniem



Nr art.
 Norma
 Materiał ostrza
 Gatunek węgla
 Powierzchnia
 Typ
 Forma chwytu
 Głębokość wiercenia
 Kierunek skrawania
 Tolerancja
 Grupa rabatowa

5510	5610
DIN 6537 K	
Węglik monolit	
K / P	
F	F
RT 100 U	
HA	HE
3 x D	
prawy	
m7	
155	

Wiertła SL

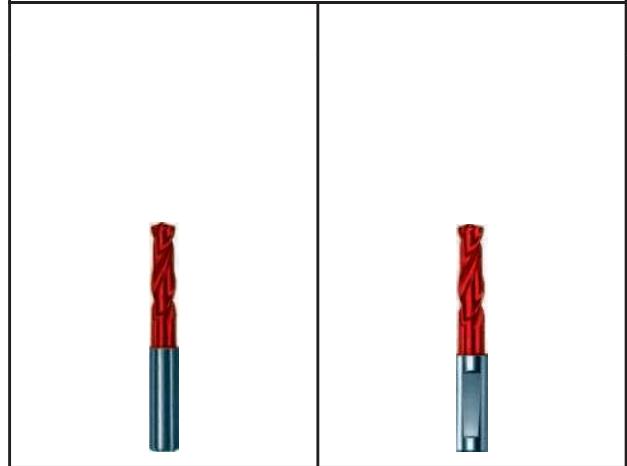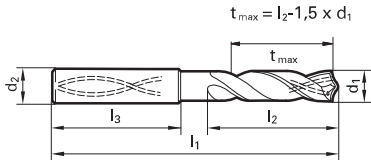

	d1		d2	l1	l2	l3
	cale	mm	mm	mm	mm	mm
		5,600	6,000	66,00	28,00	36,00
		5,700	6,000	66,00	28,00	36,00
		5,800	6,000	66,00	28,00	36,00
15/64		5,900	6,000	66,00	28,00	36,00
		5,950	6,000	66,00	28,00	36,00
		6,000	6,000	66,00	28,00	36,00
		6,100	8,000	79,00	34,00	36,00
		6,200	8,000	79,00	34,00	36,00
1/4		6,300	8,000	79,00	34,00	36,00
		6,350	8,000	79,00	34,00	36,00
		6,400	8,000	79,00	34,00	36,00
		6,500	8,000	79,00	34,00	36,00
		6,600	8,000	79,00	34,00	36,00
17/64		6,700	8,000	79,00	34,00	36,00
		6,750	8,000	79,00	34,00	36,00
		6,800	8,000	79,00	34,00	36,00
		6,900	8,000	79,00	34,00	36,00
		7,000	8,000	79,00	34,00	36,00
9/32		7,100	8,000	79,00	41,00	36,00
		7,140	8,000	79,00	41,00	36,00
		7,200	8,000	79,00	41,00	36,00
		7,300	8,000	79,00	41,00	36,00
		7,400	8,000	79,00	41,00	36,00
19/64		7,500	8,000	79,00	41,00	36,00
		7,540	8,000	79,00	41,00	36,00
		7,600	8,000	79,00	41,00	36,00
		7,700	8,000	79,00	41,00	36,00
		7,800	8,000	79,00	41,00	36,00
5/16		7,900	8,000	79,00	41,00	36,00
		7,940	8,000	79,00	41,00	36,00
		8,000	8,000	79,00	41,00	36,00
		8,100	10,000	89,00	47,00	40,00
		8,200	10,000	89,00	47,00	40,00
21/64		8,300	10,000	89,00	47,00	40,00
		8,330	10,000	89,00	47,00	40,00
		8,400	10,000	89,00	47,00	40,00

Dostępność	
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●

A TiAlN C TiCN F FIRE S TiN