




DIN 844-(A i B) L-M-N

Frezy trzpieniowe walcowo-czołowe, długie o ostrzach centralnych z chwytem walcowym

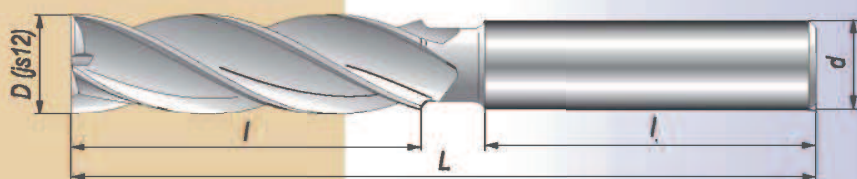

DIN 844-A L-M-N

DIN 844-B L-M-N



						DIN 844-A L-M-N			
D _(js12)	d _(h8)	l	l ₁	L	Z	HSS	HSS Golden	HSS-E	HSS-E Golden
4	6	19	36	63	4	●	○	○	○
5	6	24	36	68	4	●	○	○	○
6	6	24	36	68	4	●	○	○	○
7	10	30	40	80	4	●	○	○	○
8	10	38	40	88	4	●	○	○	○
9	10	38	40	88	4	○	○	○	○
10	10	45	40	95	4	●	○	○	○
11	12	45	45	102	4	●	○	○	○
12	12	53	45	110	4	●	○	○	○
13	12	53	45	110	4	●	○	○	○
14	12	53	45	110	4	●	○	○	○
15	12	53	45	110	4	○	○	○	○
16	16	63	48	123	4	●	○	○	○
17	16	63	48	123	4	○	○	○	○
18	16	63	48	123	4	●	○	○	○
19	16	63	48	123	4	○	○	○	○
20	20	75	50	141	4	●	○	○	○
21	20	75	50	141	6	○	○	○	○
22	20	75	50	141	6	●	○	○	○
23	20	75	50	141	6	○	○	○	○
24	25	90	56	166	6	○	○	○	○
25	25	90	56	166	6	○	○	○	○
26	25	90	56	166	6	○	○	○	○
28	25	90	56	166	6	○	○	○	○
30	25	90	56	166	6	○	○	○	○
32	32	106	60	186	6	○	○	○	○

Przykład zamówienia: Frez DIN 844-A 10 L-M-N HSS

- Frezy DIN 844-B L-M-N
- Frezy DIN 844-B L-M-N Golden