




Frezy

DIN 844-(A i B) K-M-N

Frezy trzpieniowe walcowo-czołowe, krótkie o ostrzach centralnych z chwytem walcowym

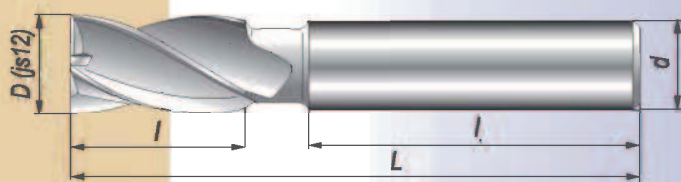

D _(js12)	d _(h8)	l	l ₁	L	Z	DIN 844-A K-M-N			
						HSS	HSS Golden	HSS-E	HSS-E Golden
4	6	11	36	55	4	●	○	○	○
5	6	13	36	57	4	●	○	○	○
6	6	13	36	57	4	●	○	○	○
7	10	16	40	66	4	●	○	○	○
8	10	19	40	69	4	●	○	○	○
9	10	19	40	69	4	●	○	○	○
10	10	22	40	72	4	●	○	○	○
11	12	22	45	79	4	●	○	○	○
12	12	26	45	83	4	●	○	○	○
13	12	26	45	83	4	●	○	○	○
14	12	26	45	83	4	●	○	○	○
15	12	26	45	83	4	●	○	○	○
16	16	32	48	92	4	●	○	○	○
17	16	32	48	92	4	●	○	○	○
18	16	32	48	92	4	●	○	○	○
19	16	32	48	92	4	○	○	○	○
20	20	38	50	104	4	●	○	○	○
21	20	38	50	104	6	○	○	○	○
22	20	38	50	104	6	●	○	○	○
23	20	38	50	104	6	○	○	○	○
24	25	45	56	121	6	○	○	○	○
25	25	45	56	121	6	●	○	○	○
26	25	45	56	121	6	○	○	○	○
28	25	45	56	121	6	○	○	○	○
30	25	45	56	121	6	○	○	○	○
32	32	53	60	133	6	○	○	○	○

Przykład zamówienia: Frez DIN 844-A 10 K-M-N HSS

- Frezy DIN 844-B K-M-N
- Frezy DIN 844-B K-M-N Golden