




Frezy trzpieniowe walcowo-czołowe, krótkie do obróbki zgrubnej z chwytem stożkowym Morse'a

DIN 845-B K-NR

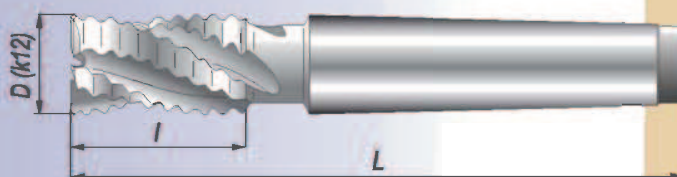

					DIN 844-B K-M-NR		DIN 844-B K-NR	
								
D _(k12)	I	L	Nr stoż.	Z	HSS-E	HSS-E Golden	HSS-E	HSS-E Golden
10	22	92	1	4	○	○	○	○
11	22	92	1	4	○	○	○	○
12	26	96	1	4	○	○	○	○
13	26	96	1	4	○	○	○	○
14	26	111	2	4	○	○	○	○
15	26	111	2	4	○	○	○	○
16	32	117	2	4	○	○	●	○
17	32	117	2	4	○	○	○	○
18	32	117	2	4	○	○	●	○
19	32	117	2	4	○	○	○	○
20	38	123	2	4	○	○	○	○
21	38	123	2	6	○	○	○	○
22	38	123	2	6	○	○	●	○
23	38	123	2	6	○	○	○	○
24	45	147	3	6	○	○	●	○
25	45	147	3	6	○	○	●	○
26	45	147	3	6	○	○	○	○
28	45	147	3	6	○	○	●	○
30	45	147	3	6	○	○	●	○

Przykład zamówienia: Frez DIN 845-B 10 K-M-NR HSS-E

