


**YG X-POWER
END MILLS**

EM890 SERIES

PLAIN SHANK
GLATTER ZYLINDERSCHAFT

CARBIDE, 4 FLUTE 25° HELIX TAPER BALL NOSE for RIB PROCESSING
VOLLHARTMETALL, 4 SCHNEIDEN 25° RECHTSSPIRALE KONISCH STIRNRADIUS für SCHMALE RIPPEN

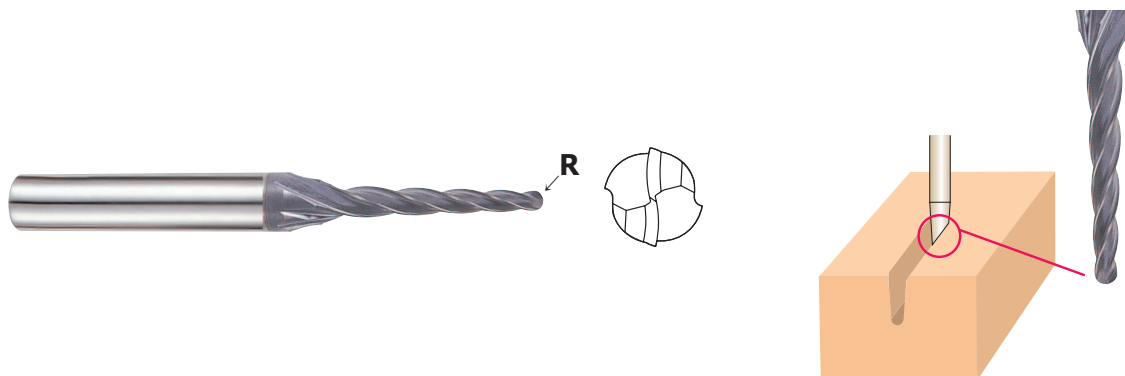

MG HM 4 25° R ±0.01 PLAIN P.675

Unit : mm

EDP No.	Radius of Ball Nose R (±0.01)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Taper Angle
EM890909	RO.5	1.0	4	8	45	30'
EM890911	RO.5	1.0	4	12	45	30'
EM890010	RO.5	1.0	4	8	45	1°
EM890916	RO.5	1.0	4	12	45	1°
EM890917	RO.5	1.0	4	8	45	1° 30'
EM890919	RO.5	1.0	4	12	45	1° 30'
EM890920	RO.5	1.0	4	8	45	2°
EM890922	RO.5	1.0	4	12	45	2°
EM890923	RO.6	1.2	4	8	45	30'
EM890925	RO.6	1.2	4	12	45	30'
EM890012	RO.6	1.2	4	8	45	1°
EM890932	RO.6	1.2	4	12	45	1°
EM890934	RO.6	1.2	4	8	45	1° 30'
EM890936	RO.6	1.2	4	12	45	1° 30'
EM890938	RO.6	1.2	4	8	45	2°
EM890940	RO.6	1.2	4	12	45	2°
EM890942	RO.75	1.5	4	8	45	30'
EM890944	RO.75	1.5	4	12	45	30'
EM890945	RO.75	1.5	4	16	50	30'
EM890015	RO.75	1.5	4	8	45	1°
EM890953	RO.75	1.5	4	12	45	1°
EM890954	RO.75	1.5	4	16	50	1°
EM890956	RO.75	1.5	4	8	45	1° 30'
EM890958	RO.75	1.5	4	12	45	1° 30'
EM890959	RO.75	1.5	4	16	50	1° 30'
EM890961	RO.75	1.5	4	8	45	2°
EM890963	RO.75	1.5	4	12	45	2°
EM890964	RO.75	1.5	4	16	50	2°

◎ : Excellent ○ : Good


Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
○	◎	◎	◎	○				○				

CARBIDE, 4 FLUTE TAPER for RIB PROCESSING
VOLLHARTMETALL, 4 SCHNEIDEN KONISCH für SCHMALE RIPPEN

EM889 SERIES

MATERIAL	NON-ALLOYED STEELS ALLOY STEELS CAST IRON			ALLOY STEELS HEAT RESISTANT STEELS			HARDENED STEELS		
HARDNESS	~ HRC30			HRC30 ~ HRC45			HRC45 ~ HRC55		
STRENGTH	~ 1000N/mm ²			1000 ~ 1500N/mm ²			1500 ~ 2000N/mm ²		
DIAMETER	RPM	FEED	ap (mm)	RPM	FEED	ap (mm)	RPM	FEED	ap (mm)
1.0	20000	700	0.020~0.040	15000	500	0.020~0.030	10000	300	0.010~0.020
1.2	16000	700	0.025~0.050	13000	500	0.025~0.040	8000	300	0.012~0.025
1.5	13000	700	0.030~0.060	10000	500	0.030~0.050	6500	300	0.015~0.030
2.0	10000	700	0.040~0.080	8000	500	0.040~0.060	5000	300	0.020~0.040

(Depth of Cut per one pass)




RPM = rev./min.
FEED = mm/min.

CARBIDE, 4 FLUTE TAPER BALL NOSE for RIB PROCESSING
VOLLHARTMETALL, 4 SCHNEIDEN KONISCH STIRNRADIUS für SCHMALE RIPPEN

EM890 SERIES

MATERIAL	NON-ALLOYED STEELS ALLOY STEELS CAST IRON			ALLOY STEELS HEAT RESISTANT STEELS			HARDENED STEELS		
HARDNESS	~ HRC30			HRC30 ~ HRC45			HRC45 ~ HRC55		
STRENGTH	~ 1000N/mm ²			1000 ~ 1500N/mm ²			1500 ~ 2000N/mm ²		
DIAMETER	RPM	FEED	ap (mm)	RPM	FEED	ap (mm)	RPM	FEED	ap (mm)
R0.5 × 1.0	20000	700	0.020~0.040	15000	500	0.020~0.030	10000	300	0.010~0.020
R0.6 × 1.2	16000	700	0.025~0.050	13000	500	0.025~0.040	8000	300	0.012~0.025
R0.75 × 1.5	13000	700	0.030~0.060	10000	500	0.030~0.050	6500	300	0.015~0.030
R1.0 × 2.0	10000	700	0.040~0.080	8000	500	0.040~0.060	5000	300	0.020~0.040

(Depth of Cut per one pass)



RPM = rev./min.
FEED = mm/min.