



PSC - TRM Ø 2.5 ~ 220



TRM heads allow high precision machining and excellent surface finish in **IT6** grade of tolerance. The adjustment sensitivity of **1 micron** on the radius is easily readable on the vernier scale and can also be performed in the machine.

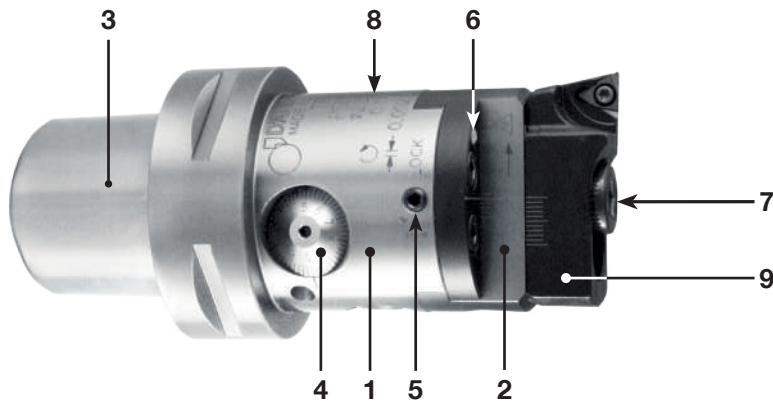


2 µm

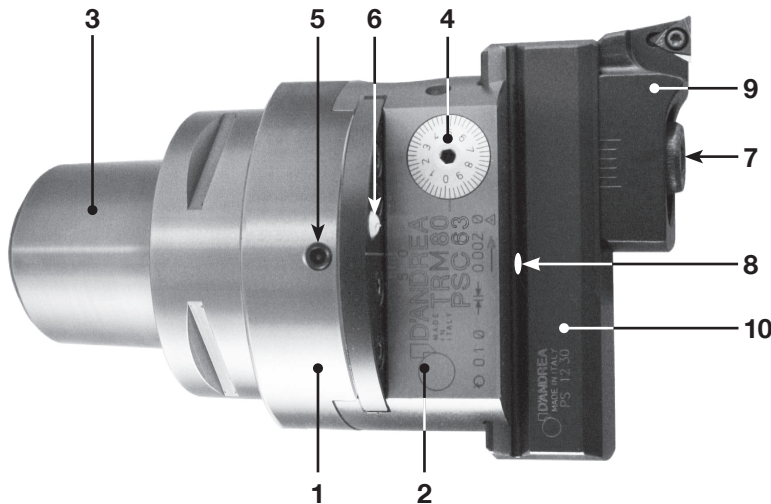


1. Body
2. Slide toolholder
3. **PSC 50-63-80**
4. Micrometric vernier scale
5. Slide clamp screw
6. Coolant outlet
- Max BAR 40**
7. Tools clamp screws
8. Oiler
9. Bit holder
10. Tool holder


PSC50 - TRM50 Ø 2.5 ~ 108

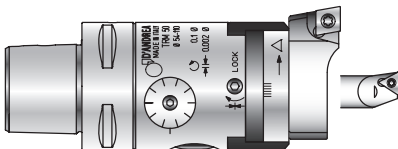

PSC63 - TRM50 Ø 2.5 ~ 108

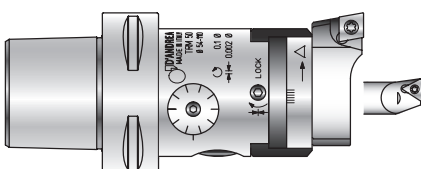

PSC63 - TRM63 Ø 2.5 ~ 125

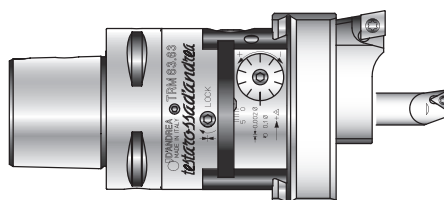

PSC63 - TRM80 Ø 2.5 ~ 220




PSC50 - TRM50

Ø 2.5 ~ 108

PSC63 - TRM50

Ø 2.5 ~ 108

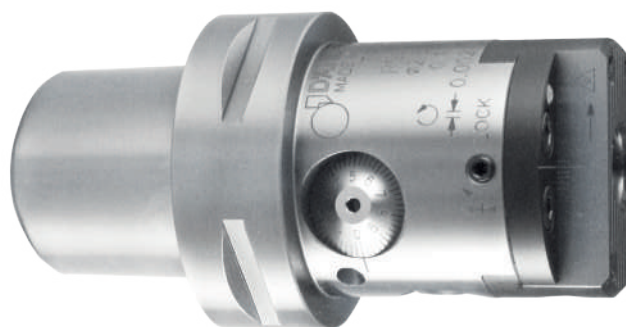

2 μm

