

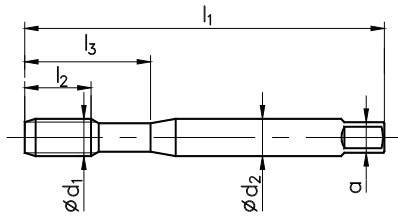


Gwint metryczny zwykły ISO DIN-13

ISO Metric coarse thread DIN-13
Metrisches ISO-Regelgewinde DIN-13



DIN-371

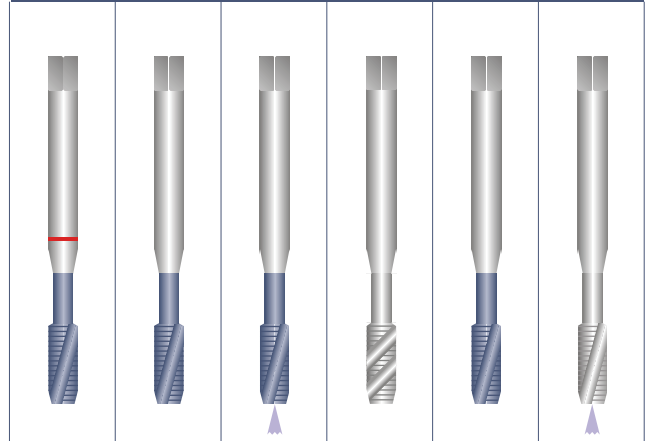

Zastosowanie	Application	Einsatzgebiete	FAN-Ni	1400	1400	AL	GAL	GAL
Materiał obrabiany	Material	Werkstoff	1.3 / 1.4 4.2 / 5.2	1.5 / 1.6 / 2.3 3.4 / 6.4 / 8.2	1.5 / 1.6 2.3 / 3.4	1.1 / 6.1 7.1	3.3 / 7.2 7.3 / 7.4	3.1 / 3.2 6.2 / 7.4
Typ otworu	Hole type	Lochform						
Wykonanie	Execution	Ausführung	R15	R15	R15 IK	R45	R15	R15 IK
Rodzaj materiału	Quality of material	Qualität	HSSE-PM	HSSE-PM	HSSE-PM	HSSE	HSSE	VHM
Rodzaj powłoki	Coating	Beschichtung	TiCN	TiCN	TiCN		TiCN	
Nakrój	Chamfer	Anschnitt	C / 2P	C / 2P	C / 2P	C / 2P	C / 2P	C / 2P
Tolerancja	Tolerance	Toleranz	6HX	6HX	6HX	ISO2 (6H)	6HX	6H

M	P	l ₁	l ₂ R15	l ₂	l ₃	d ₂	a		INDEX	C4-505101	C4-505901	C4-505951	C2-521701	C2-505601	C9-501651
M 2	0,4	45		8		2,8	2,1	1,6	0020	-	-	-	-	-	-
M 2,5	0,45	50		9		2,8	2,1	2,05	0025	-	-	-	-	-	-
M 2,6	0,45	50		9		2,8	2,1	2,1	0026	-	-	-	-	-	-
M 3	0,5	56	11	5	18	3,5	2,7	2,5	0030				•	•	-
M 3,5	0,6	56	12	6	20	4	3	2,9	0035						-
M 4	0,7	63	13	7	21	4,5	3,4	3,3	0040				•	•	-
M 4,5	0,75	70	14	7,5	25	6	4,9	3,8	0045						-
M 5	0,8	70	15	8	25	6	4,9	4,2	0050		•			•	-
M 6	1	80	17	10	30	6	4,9	5	0060		•			•	
M 7	1	80	17	10	30	7	5,5	6	0070						
M 8	1,25	90	20	13	35	8	6,2	6,8	0080		•	•	•	•	
M 9	1,25	90	20	13	35	9	7	7,8	0090						
M 10	1,5	100	20	15	39	10	8	8,5	0100		•	•	•	•	

HSSE
HSSE-PM
VHM

1