


K	D1	D	L	L1	D2	COD. Form AD + B	Availability Disponibilidad Verfügbarkeit
NEW! **30	30	46	55	33	-	003 52 54 01 06	■
40	16	23	100	73	27	003 52 54 02 13	■
40	20	29	100	73	33	003 52 54 02 14	■
40	26	36	100	73	40	003 52 54 02 15	■
40	30	46	100	73	50	003 52 54 02 16	■
40	30	46	55	28	-	003 52 54 02 06	■
40	46	63	100	73	-	003 52 54 02 07	■
50	16	23	135	97	28,5	003 52 54 04 13	■
50	20	29	135	97	34,5	003 52 54 04 14	■
50	26	36	135	97	41,5	003 52 54 04 15	■
50	30	46	63	25	-	003 52 54 04 06	■
50	46	63	63	25	-	003 52 54 04 07	■
50	46	90	63	25	-	003 52 54 04 08	■


** Form AD

** Forma AD

** Form AD

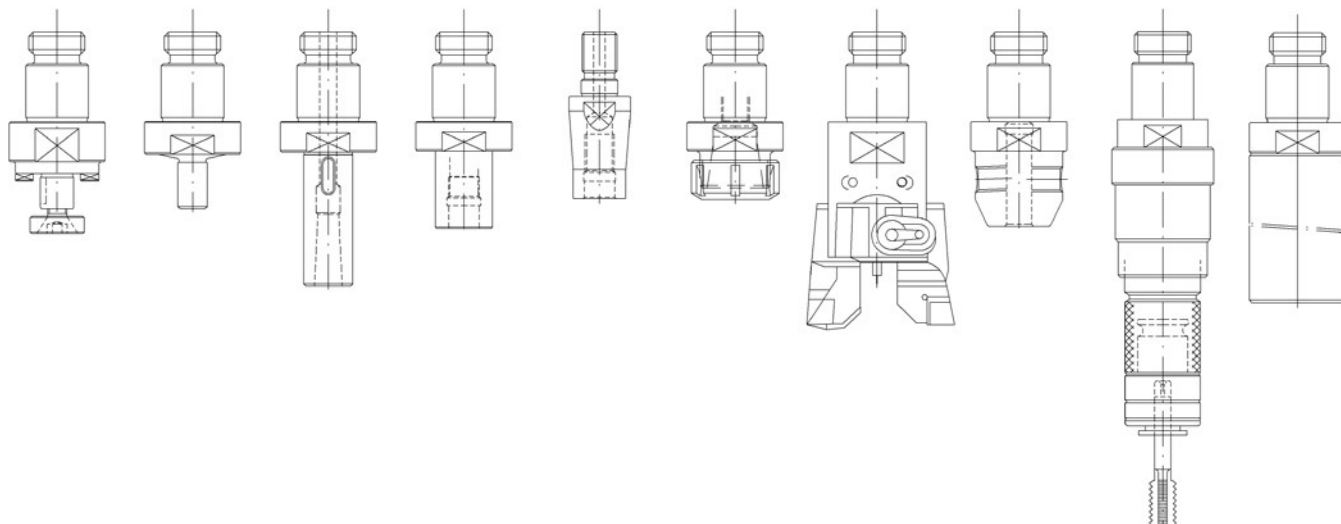

Make sure before assembling the modular system to clean and grease properly every single piece.

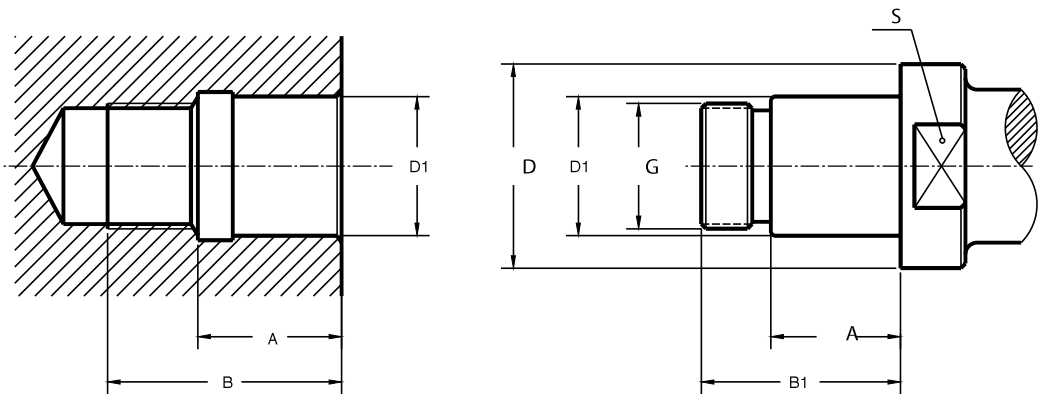

D	D1	G	A	B	A1	B1	S
14,5	10,5	M.10 x 1,5	9	17	7,5	15,5	13
18,5	13	M.12 x 1,75	14	24	12,5	21	17
23	16	M.14 x 2	17	28	15	25	25
29	20	M.16 x 2	21	34	19	31	24
36	26	M.20 x 2,5	27	42	24	39	32
46	30	M.27 x 3	30	46	28	43	41
63	46	M.42 x 4,5	48	70	41	64	55
90	46	M.42 x 4,5	48	70	41	64	75

Material

Case-hardening alloy steel.
 Case-hardened and tempered.
 Minimum strength in core 880 N/mm²
 Surface hardness HRC 57 ÷ 60

Material

Acero aleado de cementación.
 Cementado y templado.
 Resistencia mínima al núcleo 880 N/mm²
 Dureza superficial HRC 57 ÷ 60

Material

Hochlegierter Stahl
 Einsatzgehärtet
 Zugfestigkeit im Kern: mind. 880 N/mm²
 Oberflächenhärte: HRC 57-60