




SNMM




	IC	D1	L	S
	(mm)	(mm)	(mm)	(mm)
1204	12.700	5.16	12.70	4.76
1506	15.875	6.35	15.875	6.35
1906	19.050	7.94	19.05	6.35
2507	25.400	9.12	25.40	7.94
2509	25.400	9.12	25.40	9.525

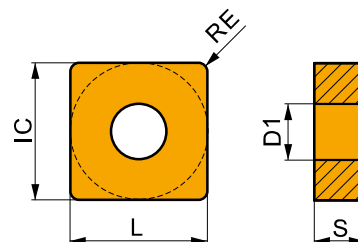


Zalecane początkowe wartości dla prędkości skrawania (vc), posuwu (f) i głębokości skrawania (ap). Więcej opcji można znaleźć w naszej aplikacji Kalkulator Parametrów Skrawania.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	(mm)	(m/min)	(mm/rev)	(mm)	(m/min)	(mm/rev)	(mm)	(m/min)	(mm/rev)	(mm)	(m/min)	(mm/rev)	(mm)	(m/min)	(mm/rev)	(mm)	(m/min)	(mm/rev)	(mm)



Geometria DR do obróbki od półzgrubnej do zgrubnej, do ciągłych i przerywanych warunków pracy.

SNMM 120412E-DR	T9315	1.2	245	0.45	4.7	—	—	—	230	0.45	4.7	—	—	—	—	—	—	—	—
	T9325	1.2	220	0.45	4.7	130	0.41	4.7	205	0.45	4.7	—	—	—	—	—	—	—	—
	T9335	1.2	185	0.45	4.7	110	0.41	4.7	—	—	—	—	—	—	—	—	—	—	—
SNMM 150612E-DR	T9325	1.2	210	0.45	6.0	125	0.41	6.0	195	0.45	6.0	—	—	—	—	—	—	—	—
	T9335	1.2	180	0.45	6.0	105	0.41	6.0	—	—	—	—	—	—	—	—	—	—	—
SNMM 190612E-DR	6640	1.2	170	0.45	6.0	100	0.41	6.0	160	0.45	6.0	—	—	—	—	—	—	—	—
	T9325	1.2	210	0.45	6.0	125	0.41	6.0	195	0.45	6.0	—	—	—	—	—	—	—	—
	T9335	1.2	180	0.45	6.0	105	0.41	6.0	—	—	—	—	—	—	—	—	—	—	—
SNMM 190616E-DR	T9325	1.6	210	0.50	6.0	125	0.45	6.0	195	0.50	6.0	—	—	—	—	—	—	—	—
	T9335	1.6	185	0.50	6.0	110	0.45	6.0	—	—	—	—	—	—	—	—	—	—	—



Geometria HR do obróbki zgrubnej i ciężkiej, do ciągłych i przerywanych warunków pracy.

SNMM 190616E-HR	T8345	1.6	60	0.60	9.0	35	0.54	9.0	55	0.60	9.0	—	—	—	—	—	—	—	—
	T9325	1.6	110	0.60	9.0	65	0.54	9.0	100	0.60	9.0	—	—	—	—	—	—	—	—
	T9335	1.6	85	0.60	9.0	50	0.54	9.0	—	—	—	—	—	—	—	—	—	—	—
SNMM 190624E-HR	T8345	2.4	60	0.65	9.0	35	0.59	9.0	55	0.65	9.0	—	—	—	—	—	—	—	—
	T9315	2.4	120	0.65	9.0	—	—	—	110	0.65	9.0	—	—	—	—	—	—	—	—
	T9325	2.4	115	0.65	9.0	65	0.59	9.0	105	0.65	9.0	—	—	—	—	—	—	—	—
SNMM 250716E-HR	T9335	2.4	90	0.65	9.0	50	0.59	9.0	—	—	—	—	—	—	—	—	—	—	—
	T8345	1.6	60	0.60	13.0	35	0.54	13.0	55	0.60	13.0	—	—	—	—	—	—	—	—
	T9325	1.6	100	0.60	13.0	60	0.54	13.0	95	0.60	13.0	—	—	—	—	—	—	—	—
SNMM 250724E-HR	T9335	1.6	85	0.60	13.0	50	0.54	13.0	—	—	—	—	—	—	—	—	—	—	—
	6640	2.4	80	0.65	13.0	45	0.59	13.0	75	0.65	13.0	—	—	—	—	—	—	—	—
	T8345	2.4	55	0.65	13.0	30	0.59	13.0	50	0.65	13.0	—	—	—	—	—	—	—	—
SNMM 250732E-HR	T9315	2.4	120	0.65	13.0	—	—	—	110	0.65	13.0	—	—	—	—	—	—	—	—
	T9325	2.4	105	0.65	13.0	60	0.59	13.0	95	0.65	13.0	—	—	—	—	—	—	—	—
	T9335	2.4	85	0.65	13.0	50	0.59	13.0	—	—	—	—	—	—	—	—	—	—	—
SNMM 250924E-HR	T9325	3.2	95	0.80	13.0	55	0.72	13.0	90	0.80	13.0	—	—	—	—	—	—	—	—
SNMM 250932E-HR	T8345	2.4	55	0.65	13.0	30	0.59	13.0	50	0.65	13.0	—	—	—	—	—	—	—	—
	T9315	2.4	120	0.65	13.0	—	—	—	110	0.65	13.0	—	—	—	—	—	—	—	—
	T9325	2.4	105	0.65	13.0	60	0.59	13.0	95	0.65	13.0	—	—	—	—	—	—	—	—
SNMM 250932E-HR	T9335	2.4	85	0.65	13.0	50	0.59	13.0	—	—	—	—	—	—	—	—	—	—	—
	T9325	3.2	95	0.80	13.0	55	0.72	13.0	90	0.80	13.0	—	—	—	—	—	—	—	—