





Rozwiertaki

DIN 204-C, D i NRSa

Rozwiertaki ręczne do gniazd stożkowych Morse'a

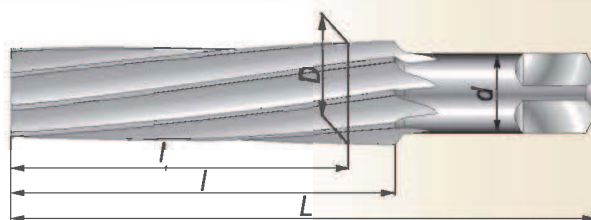

Nr stożka	Zbieżność	D	d	l ₁	l	L	Z	DIN 204-C	DIN 204-D	NRSa
0	1 : 19.212	9.045	8	48	61	93	6	○	○	○
1	1 : 20.047	12.065	10	50	66	102	6	○	○	○
2	1 : 20.020	17.780	14	61	79	121	8	○	○	○
3	1 : 19.992	23.825	20	76	96	146	8	○	○	○
4	1 : 19.254	31.267	25	97	119	179	10	○	○	○
5	1 : 19.002	44.399	31.5	124	150	222	12	○	○	○
6	1 : 19.180	63.348	45	176	208	300	14	○	○	○

Przykład zamówienia: Rozwiertak DIN 204-C 4 HSS



Przykład budowy oznaczenia:

ROZWIERTAK DIN 204 - C 4 - HSS

Nazwa oraz Nr normy

Typ rowków wiórowych (C - proste, D - śrubowe)

Wielkość nominalna - Nr stożka Morse'a

Symbol materiału części skrawającej