



Wiertła Ratio bez wewnętrznego chłodzenia



Nr art.
Norma
Materiał ostrza
Gatunek węgla
Powierzchnia
Typ
Forma chwytu
Głębokość wiercenia
Kierunek skrawania
Tolerancja
Grupa rabatowa

5514	5614
DIN 6537 K	
Węglik monolit	
K / P	
RT 100 U	
HA	HE
3 x D	
prawy	
m7	
155	

Wiertła SL

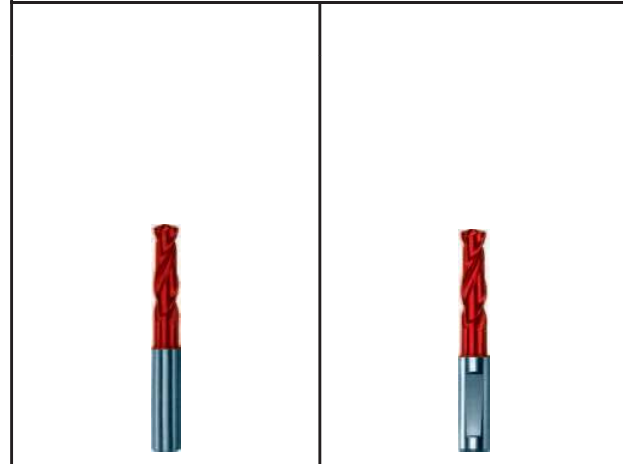

d1		d2	l1	l2	l3
cale	mm	mm	mm	mm	mm
	11,400	12,000	102,00	55,00	45,00
	11,500	12,000	102,00	55,00	45,00
	11,600	12,000	102,00	55,00	45,00
	11,700	12,000	102,00	55,00	45,00
	11,800	12,000	102,00	55,00	45,00
	11,900	12,000	102,00	55,00	45,00
15/32	11,910	12,000	102,00	55,00	45,00
	12,000	12,000	102,00	55,00	45,00
	12,200	14,000	107,00	60,00	45,00
1/2	12,500	14,000	107,00	60,00	45,00
	12,700	14,000	107,00	60,00	45,00
	13,000	14,000	107,00	60,00	45,00
	13,500	14,000	107,00	60,00	45,00
	13,700	14,000	107,00	60,00	45,00
9/16	14,000	14,000	107,00	60,00	45,00
	14,200	16,000	115,00	65,00	48,00
	14,290	16,000	115,00	65,00	48,00
	14,500	16,000	115,00	65,00	48,00
	14,700	16,000	115,00	65,00	48,00
	15,000	16,000	115,00	65,00	48,00
	15,200	16,000	115,00	65,00	48,00
	15,500	16,000	115,00	65,00	48,00
	15,700	16,000	115,00	65,00	48,00
	16,000	16,000	115,00	65,00	48,00
	16,500	18,000	123,00	73,00	48,00
	17,000	18,000	123,00	73,00	48,00
	17,500	18,000	123,00	73,00	48,00
	18,000	18,000	123,00	73,00	48,00
	18,500	20,000	131,00	79,00	50,00
	19,000	20,000	131,00	79,00	50,00
	19,500	20,000	131,00	79,00	50,00
	20,000	20,000	131,00	79,00	50,00

Dostępność	
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●

TiAlN TiCN FIRE TiN