


Wiertła Ratio bez wewnętrznego chłodzenia



Wiertła SL

- Nr art.
- Norma
- Materiał ostrza
- Gatunek węgla
- Powierzchnia
- Typ
- Forma chwytu
- Głębokość wiercenia
- Kierunek skrawania
- Tolerancja
- Grupa rabatowa

5514	5614
DIN 6537 K	
Węglak monolit	
K / P	
F	F
RT 100 U	
HA	HE
3 x D	
prawy	
m7	
155	

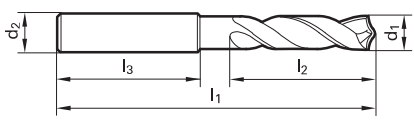

	d1		d2	l1	l2	l3	
	cale	mm	mm	mm	mm	mm	
		5,600	6,000	66,00	28,00	36,00	
		5,700	6,000	66,00	28,00	36,00	
		5,800	6,000	66,00	28,00	36,00	
15/64		5,900	6,000	66,00	28,00	36,00	
		5,950	6,000	66,00	28,00	36,00	
		6,000	6,000	66,00	28,00	36,00	
		6,100	8,000	79,00	34,00	36,00	
		6,200	8,000	79,00	34,00	36,00	
		6,300	8,000	79,00	34,00	36,00	
		6,350	8,000	79,00	34,00	36,00	
1/4		6,400	8,000	79,00	34,00	36,00	
		6,500	8,000	79,00	34,00	36,00	
		6,600	8,000	79,00	34,00	36,00	
		6,700	8,000	79,00	34,00	36,00	
17/64		6,750	8,000	79,00	34,00	36,00	
		6,800	8,000	79,00	34,00	36,00	
		6,900	8,000	79,00	34,00	36,00	
		7,000	8,000	79,00	34,00	36,00	
		7,100	8,000	79,00	41,00	36,00	
	9/32		7,140	8,000	79,00	41,00	36,00
			7,200	8,000	79,00	41,00	36,00
			7,300	8,000	79,00	41,00	36,00
		7,400	8,000	79,00	41,00	36,00	
		7,500	8,000	79,00	41,00	36,00	
	19/64		7,540	8,000	79,00	41,00	36,00
			7,600	8,000	79,00	41,00	36,00
			7,700	8,000	79,00	41,00	36,00
			7,800	8,000	79,00	41,00	36,00
		5/16		7,900	8,000	79,00	41,00
			7,940	8,000	79,00	41,00	36,00
			8,000	8,000	79,00	41,00	36,00
			8,100	10,000	89,00	47,00	40,00
			8,200	10,000	89,00	47,00	40,00
		21/64		8,300	10,000	89,00	47,00
			8,330	10,000	89,00	47,00	40,00
		8,400	10,000	89,00	47,00	40,00	

Dostępność	
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●

A TiAIN
 C TiCN
 F FIRE
 S TiN