





Wiertła Ratio bez wewnętrznego chłodzenia


Wiertła SL

- Nr art.
- Norma
- Materiał ostrza
- Gatunek węglik
- Powierzchnia
- Typ
- Forma chwytu
- Głębokość wiercenia
- Kierunek skrawania
- Tolerancja
- Grupa rabatowa

5515	5615
DIN 6537 L	
Węglik monolit	
K / P	
P	P
RT 100 U	
HA	HE
5 x D	
prawy	
m7	
155	

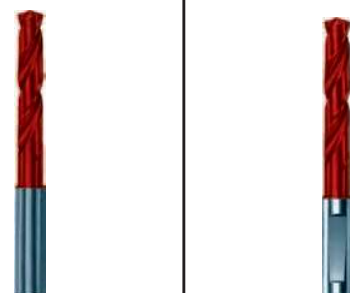

	d1		d2	l1	l2	l3
	cale	mm	mm	mm	mm	mm
		8,500	10,000	103,00	61,00	40,00
		8,600	10,000	103,00	61,00	40,00
		8,700	10,000	103,00	61,00	40,00
11/32		8,730	10,000	103,00	61,00	40,00
		8,800	10,000	103,00	61,00	40,00
		8,900	10,000	103,00	61,00	40,00
23/64		9,000	10,000	103,00	61,00	40,00
		9,100	10,000	103,00	61,00	40,00
		9,130	10,000	103,00	61,00	40,00
		9,200	10,000	103,00	61,00	40,00
		9,250	10,000	103,00	61,00	40,00
		9,300	10,000	103,00	61,00	40,00
3/8		9,400	10,000	103,00	61,00	40,00
		9,500	10,000	103,00	61,00	40,00
		9,520	10,000	103,00	61,00	40,00
		9,600	10,000	103,00	61,00	40,00
		9,700	10,000	103,00	61,00	40,00
		9,800	10,000	103,00	61,00	40,00
25/64		9,900	10,000	103,00	61,00	40,00
		9,920	10,000	103,00	61,00	40,00
		10,000	10,000	103,00	61,00	40,00
		10,100	12,000	118,00	71,00	45,00
		10,200	12,000	118,00	71,00	45,00
		10,300	12,000	118,00	71,00	45,00
13/32		10,320	12,000	118,00	71,00	45,00
		10,400	12,000	118,00	71,00	45,00
		10,500	12,000	118,00	71,00	45,00
		10,600	12,000	118,00	71,00	45,00
		10,700	12,000	118,00	71,00	45,00
		10,800	12,000	118,00	71,00	45,00
7/16		10,900	12,000	118,00	71,00	45,00
		11,000	12,000	118,00	71,00	45,00
		11,100	12,000	118,00	71,00	45,00
		11,110	12,000	118,00	71,00	45,00
		11,200	12,000	118,00	71,00	45,00
		11,300	12,000	118,00	71,00	45,00

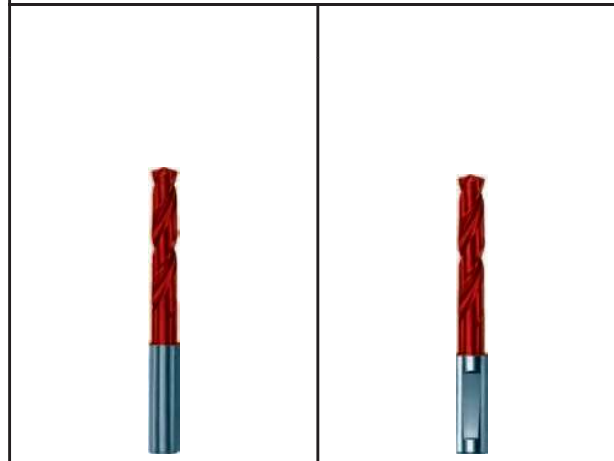

Dostępność

●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●

- bez pokrycia
 parowane
 azotowane