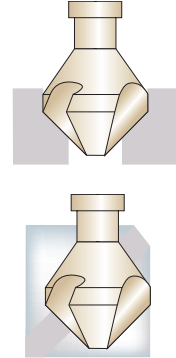
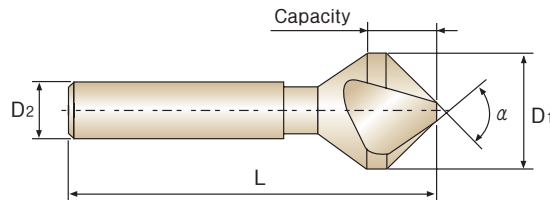


HSS THREE FLUTE COUNTERSINKS

HSS DREISCHNEIDEN KEGELSENKER

- ▶ Self-centering(3 flutes).
- ▶ Designed for 90° capscrews countersinking.
- ▶ Hand using.
- ▶ Longitudinal chamfers and contouring.
- ▶ Works without vibrations

- ▶ Selbstzentrierend
- ▶ Besonders geeignet zum 90° Ansenken für Senkkopfschrauben
- ▶ Manueller Einsatz möglich
- ▶ Zum Entgraten von Längs- und Profilkanten
- ▶ Arbeitet ohne Vibration


DIN 335 C

Unit : mm

EDP No. (uncoating)			Angle α (-1°)	Nominal Diameter D1	Shank Diameter D2	Overall Length L(±1)	Capacity min/max
HSSCo8	HSS-E	HSS					
C1139043	C2139043	C3139043	90°	4.3	4	40	1.3 - 4.3
C1139050	C2139050	C3139050	90°	5.0	4	40	1.5 - 5
C1139060	C2139060	C3139060	90°	6.0	5	45	1.5 - 6
C1139063	C2139063	C3139063	90°	6.3	5	45	1.5 - 6.3
C1139070	C2139070	C3139070	90°	7.0	6	50	1.8 - 7
C1139080	C2139080	C3139080	90°	8.0	6	50	2 - 8
C1139083	C2139083	C3139083	90°	8.3	6	50	2 - 8.3
C1139100	C2139100	C3139100	90°	10.0	6	50	2.5 - 10
C1139104	C2139104	C3139104	90°	10.4	6	50	2.5 - 10.4
C1139115	C2139115	C3139115	90°	11.5	8	56	2.8 - 11.5
C1139124	C2139124	C3139124	90°	12.4	8	56	2.8 - 12.4
C1139150	C2139150	C3139150	90°	15.0	10	60	3.2 - 15
C1139165	C2139165	C3139165	90°	16.5	10	60	3.2 - 16.5
C1139190	C2139190	C3139190	90°	19.0	10	63	3.5 - 19
C1139205	C2139205	C3139205	90°	20.5	10	63	3.5 - 20.5
C1139230	C2139230	C3139230	90°	23.0	10	67	3.8 - 23
C1139250	C2139250	C3139250	90°	25.0	10	67	3.8 - 25
C1139300	C2139300	C3139300	90°	30.0	12	71	4.2 - 30
C1139310	C2139310	C3139310	90°	31.0	12	71	4.2 - 31

▶ TiN & TiCN coating are available on your request.

Nominal Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)
±0.05	h9