


**GREAT POWER COLLET CHUCKS -SLIM LINE-
PORTAPINZAS DE GRAN APRIETE -SERIE FINA-
HOCHLEISTUNGS-KRAFTSPANNFUTTER -SCHLANKE AUSFÜHRUNG-**

004 05 15 ...



For tools with cylindrical straight shank.
Para herramientas con mango cilíndrico.
Für Werkzeuge mit zylindrischem Schaft.

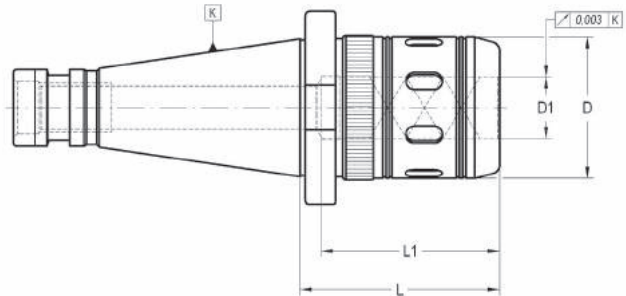

K	D1 max.	L	D	L1	COD.	Availability Disponibilidad Verfügbarkeit	
40	20	65	46	60	004 05 15 02 04	■	004 99 04 02 06
40	32	80	62	75	004 05 15 02 06	■	004 99 04 02 06
50	20	70	46	60	004 05 15 04 04	■	004 99 04 02 06
50	32	75	62	80	004 05 15 04 06	■	004 99 04 02 06
50	40	105	85	90	004 05 15 04 07	□	004 99 04 02 06
50	50	105	99	90	004 05 15 04 09	□	004 99 04 02 06

- For an optimum performance of the chuck it is highly recommended to use h6 cylindrical tools.
- For tools with nominal Ø equal to "D1 max." the collet is not needed.

- Para un máximo rendimiento del portapinzas se recomienda utilizar herramientas de mango cilíndrico con tolerancia h6.
- La herramienta cuyo diámetro corresponda a "D1 max." se sujeta sin necesidad de pinza.

- Für die optimale Leistung empfehlen wir nur zylindrische Werkzeuge mit der Schafttoleranz h6 einzusetzen.
- Für Werkzeuge mit gleichem Nenn-Drm. wie D1 max. ist eine Einsatzhülse nicht notwendig.

Page: 309

Use recommendations
Recomendaciones de uso
Anwendungsempfehlungen

**RELATED ELEMENTS
ELEMENTOS RELACIONADOS
VERWANDTE ARTIKEL**

Page: 235/250



**ACCESSORIES INCLUDED
ACCESORIOS INCLUIDOS
ZUBEHÖR ENTHALT**

Conventional
Convencional
Standardausführung

Notch free nut
Tuerca lisa
Nutenlose Mutter



D1
20 351 04 00 14 07
32 351 04 00 14 07

D1
20 351 04 00 34 07
32 351 04 00 34 07

Wrench for conventional nut
Llave para tuerca convencional
Standardausführungsschlüssel



D1
20 004 99 04 09 09
32 004 99 04 09 11

Wrench for not free nut
Llave para tuerca lisa
Rollenspannschlüssel



004 99 04 07 46
004 99 04 07 62