




SQ340	US 44012-T15P	3.5	M 4	12	–	–	Flag T15P	–
SQ341	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	–
SQ342	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	HS 0830C
SQ343	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	HS 1030C

AC001	KS 1230	K.FMH27
AC002	KS 1635	K.FMH32
AC003	KS 2040	K.FMH40

LNGX 12




	W1	D1	L	S
	(mm)	(mm)	(mm)	(mm)
1205	9.500	4.50	12.00	5.96

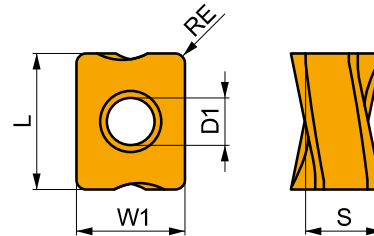


Zalecane początkowe wartości dla prędkości skrawania (vc), posuwu (f) i głębokości skrawania (ap). Więcej opcji można znaleźć w naszej aplikacji kalkulatora parametrów.

Produkt	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)



Geometria F z bardzo pozytywną konstrukcją, do obróbki lekkiej.

LNGX 120504ER-F	8215	0.4	200	0.15	1.5	–	–	–	190	0.15	1.5	–	–	–	–	–	–	–	–	–
	M8330	0.4	200	0.15	1.5	–	–	–	190	0.15	1.5	–	–	–	–	–	–	–	–	–
	M8340	0.4	180	0.15	1.5	–	–	–	170	0.15	1.5	–	–	–	–	–	–	–	–	–
LNGX 120508ER-F	8215	0.8	240	0.15	1.5	–	–	–	225	0.15	1.5	–	–	–	–	–	–	–	–	–
	M8310	0.8	260	0.15	1.5	–	–	–	245	0.15	1.5	–	–	–	–	–	–	–	–	–
	M8330	0.8	235	0.15	1.5	–	–	–	220	0.15	1.5	–	–	–	–	–	–	–	–	–
	M8340	0.8	215	0.15	1.5	–	–	–	200	0.15	1.5	–	–	–	–	–	–	–	–	–



Geometria M z pozytywną konstrukcją, do obróbki lekkiej i średniej.

LNGX 120504ER-M	M8330	0.4	185	0.15	3.0	–	–	–	175	0.15	3.0	–	–	–	–	–	–	–	–	–
	M8340	0.4	170	0.15	3.0	–	–	–	160	0.15	3.0	–	–	–	–	–	–	–	–	–
LNGX 120508ER-M	8215	0.8	220	0.15	3.0	–	–	–	205	0.15	3.0	–	–	–	–	–	–	–	–	–
	M8310	0.8	240	0.15	3.0	–	–	–	225	0.15	3.0	–	–	–	–	–	–	–	–	–
	M8330	0.8	220	0.15	3.0	–	–	–	205	0.15	3.0	–	–	–	–	–	–	–	–	–
	M8340	0.8	200	0.15	3.0	–	–	–	190	0.15	3.0	–	–	–	–	–	–	–	–	–
	M9315	0.8	300	0.15	3.0	–	–	–	285	0.15	3.0	–	–	–	–	–	–	–	–	–
	M9325	0.8	280	0.15	3.0	–	–	–	265	0.15	3.0	–	–	–	–	–	–	–	–	–
LNGX 120510ER-M	M8330	1.0	230	0.15	3.0	–	–	–	215	0.15	3.0	–	–	–	–	–	–	–	–	–
	M8340	1.0	210	0.15	3.0	–	–	–	195	0.15	3.0	–	–	–	–	–	–	–	–	–